



Remote Viewing from anywhere over the Internet using Microsoft Internet Explorer



Remote Viewing Apps Available for both the iPhone, iPad & Android Devices

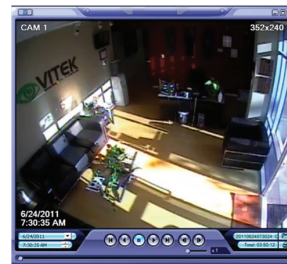

View backups on PC computers using included Backup Player Software

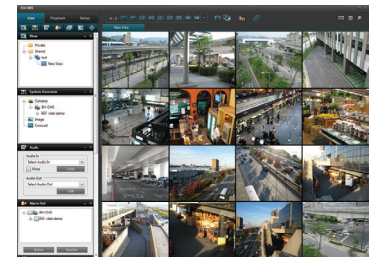

Included CMS Software allows remote viewing & control of multiple DVR's even when located at multiple locations!

FEATURES

- 4, 8 or 16 Video Inputs with 1 Main, 1 Spot Monitor Output, and 1 DVI output
- H.264 Compression
- Up to 480fps Live Display & 480fps Recording (VT-EH16) / 240/240 (VT-EH8) / 120/120 (VT-EH4)
- Supports both Dynamic and Static IP Addresses
- 4 Alarm Inputs / 1 Relay Out
- 500GB to 4TB Internal Storage Options
- Supports two internal Hard Drives
- Remote Viewing over the Internet, LAN, Explorer, Safari, Firefox, Opera and Chrome
- Applications for iPhone, iPad, iTouch and Droid Devices
- "Quick Search" Function for automatic review
- Mac OSX Client & CMS Central Management Software Included
- Automatic sending of Health & Event notifications via email
- Control locally via Front Panel, USB Mouse or with the Included IR Remote control
- PTZ Control over RS-485
- Rack Kit "Ears" Available (VT-E RK)

The Patriarch of the EH Family offers the most powerful features and function ability of any DVR in its class, pound-for-pound. Available configurations of 4, 8 and 16 channels with a maximum 4 Terabytes internal storage deliver real time recording and simple, reliable operation that has positioned the recorder as the Best Selling VITEK Digital Video Recorder of all time.



Easy setup with the included Quick Installation Guide & Software DVD



VT-EH4 Rear Connections




VT-EH8 Rear Connections



VT-EH16 Rear Connections

Detailed Specifications	VT-EH4	VT-EH8	VT-EH16
Video Input	4 Channels	8 Channels	16 Channels
Video Compression	H.264 Codec		
IPS (Display / Recording)	120 / 120	240 / 240	480 / 480
Operating System	Linux		
Operation Mode	Pentaplex		
Video Output	DVI - 1 SXGA (1280 X1024)		
BNC Output	Monitor: 1 Composite(BNC) / Spot: 1 Composite(BNC)		
Spit-Screen	Live: 1, 4, SEQ / Playback: 1, 4	Live: 1,4,6,8,9, SEQ / Playback: 1, 4, 9	Live: 1,4,6,8,9, 16, SEQ / Playback: 1, 4, 9, 16
Audio In/Out	4 Line In (RCA) / 1 Line Out (RCA), CODEC : G.711 (64Kbps)		
Storage	Up to 2 Internal HDD's (SATA)		
Archive	USB Device & Network		
USB Port	2 Front		
System Control	Front Panel, USB Mouse, Included IR Remote Control, or Keyboard controller		
Network	TCP/IP, HTTP, DHCP (DDNS)		
RJ-45 Ethernet Port	10M/100M		
Search	Calendar, Event		
Playback Rate	120fps @ 704x240 60fps @ 704x480	240 fps @ 352x240 120 fps @ 704x240 60 fps @ 704x480	480 fps @ 352x240 240 fps @ 704x240 120 fps @ 704x480
PTZ	1 - RS-485 - Supports most of PTZ protocols with up to 255 Presets		
Point of Sale (POS)	N/A		
Motion Area Setting	Adjustable GRID(16X16), 10 Steps Sensitivity Level		
Recording Resolution Setting	Individual resolution settings for each camera (CIF/2CIF/D1)		
Recording Quality Control	4 Levels (Low/Standard/High/Highest)		
Recording Schedule	By hour, by day, by recording mode, By alarm, By Channel		
Panic Record	Overrides all other recording settings to provide the best quality recording		
Pre-recording	Max. 5 seconds		
Post-recording	Max. 180 seconds		
Player	Backup player, Window Media Player and HDD PC Viewer		
E-mail notification	E-mails to specific users to notify events		
System Configuration	Full setup configuration over network		
Bandwidth limit	YES: Adjustable by User		
Two-Way Audio	YES		
Power	12V Adaptor, 5A, 100~220VAC, 50~60Hz		
Operating Temperature	32° ~ 104°F (0° ~ 40°C)		
Humidity	10 ~ 90% NC		
Case Form Factor	1.5U		
Dimensions	16" x 2.75" x 14.25"		



(888) VITEK-70 | WWW.VITEKCCTV.COM
28492 Constellation Road Valencia, CA 91355