

VTC-C770WS

700 TVL Pixim Powered
Ultra Dynamic Range
Color CCD Camera



(Lens not included)

Are you a CCTV Specialist working with or at a Casino? VITEK Industrial Video Products, Inc. is pleased to announce an extraordinary addition to our camera line. The VTC-C770WS was specifically designed and tuned to meet the challenging lighting and specialized demands of the casino environment. This Pixim Powered WDR Color CCD Camera with 700TVL has a compact design able to fit easily within a Pelco DF5 Housing. Advanced on screen display with optional UTC Remote and true ICR Day/Night functions are among its many other features.

FEATURES

- 700TVL High Resolution
- Pixim D8800C Seawolf Digital Imaging System
- 0.00008 Lux (F1.2@40IRE using sense-up)
- Designed to fit in Pelco DF5 Housing
- Supports C/CS mount DC Drive Lenses
- Supports NTSC & PAL Standards
- On Screen Display (OSD) Menu w/Optional Remote
- 24VAC (245mA / 5.88VA) & 12VDC (300mA / 3.6W)



High Resolution Miniature Ultra Dynamic Range Camera

The most powerful camera upgrade available, designed to fit in Pelco DF5 Housing



Standard CCD Security Camera

Low resolution, poor dynamic range, subpar image quality



VITEK UDR with enhanced Pixim Seawolf DSP

High resolution, Ultra Dynamic Range, crystal clear image quality



Optional Remote OSD Controller VT-UTCC





(888) VITEK-70 | WWW.VITEKCCTV.COM
28492 Constellation Road Valencia, CA 91355

VTC-C770WS

700 TVL Pixim Powered
Ultra Dynamic Range
Color CCD Camera

Detailed Specifications	NTSC	PAL
Image Device	1/3" CMY Color DPS SENSOR (Pixim Seawolf D8800C Series)	
Effective Pixels	768(H) x 540(V)	
TV System	525 Lines / 2:1 Interlace	625 Lines / 2:1 Interlace
Scan Frequency	59.94Hz(V), 15.734KHz(H)	50Hz(V), 15.625KHz(H)
Synchronization	Internal	
H. Resolution	700TVL	
Sensitivity	0.00008Lux (F1.2@40IRE using Sense Up)	
S/N Ratio	More than 50dB with AGC OFF at 50IRE	
White Balance	2,000 - 11,000K Automatic Tracking	
WDR Mode	[Low/Middle/High/Custom (User Adjustment)]	
Auto Iris Control	DC Drive Iris Control. Level Control is fixed internally.	
SENSE-UP	2X, 4X, 8X, 16X, 32X, 64X ESS	
Motion Detection	On/Off (4 Programmable Zone)	
D-PTZ	Up to 12X Digital Zoom	
FLIP	Off / H-Flip / V-Flip / H/V-Flip	
Privacy Zone	On/Off (6 Programmable Zone)	
Flicker Reduction	Yes (NTSC Japanese Version Only)	
OSD Language	Yes (Setup Menu Only)	
Video Output	VBS 1Vpp +/- 10%, 75ohm	
Lens Mount	CS Mount	
Operating Power	24VAC (245mA / 5.88VA) or 12VDC (300mA / 3.6W)	
Operating Condition	14°F - 122°F (-10°C - 50°C) 85% RH. Max. Non-Condensing	
Dimensions (W X H X L)	1.9in x 2in x 2.4in (48mm x 51mm x 60.5mm)	

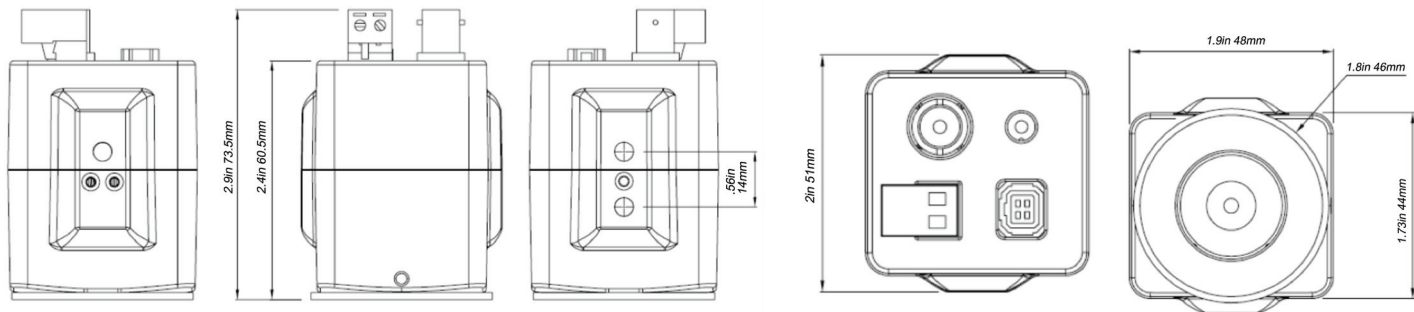

(888) VITEK-70 | WWW.VITEKCCTV.COM
28492 Constellation Road Valencia, CA 91355