


VTC-BHOCR4F

2.0MP HD-SDI IP68 Vandal Resistant WDR Bullet Camera with 4.3mm Lens & 25 IR LEDs



FEATURES:


- 1/2.9" Sony CMOS (IMX122LQJ)
- 2.0 MegaPixel With full 1080p HD-SDI Output (SMPTE 292M)
- 25 850nm Dynamic Intensity IR LEDs with 100' Range
- 4.3mm Fixed Iris lens Included
- Mechanical IR Cut Filter (True Day/Night)
- 3D-DNR Noise Reduction
- 16:9 Video format
- 100% Pure Digital Transmission of video data
- Up to 700' HD Transmission Range (Depending on cable characteristics and integrity)
- 12VDC Operation

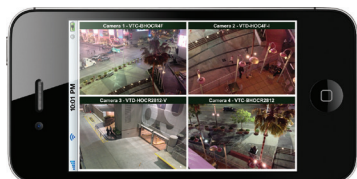

Remote Viewing Apps for iPhone, iPad & Android



With the all new On Cue Lineup, 2MP 1080P images can be recorded using existing coax cable with distances up to 700' depending on cable characteristics and integrity. 4 new camera options cover most any application, and High Definition Stand-Alone Digital Recorders with remote software and mobile apps offer performance and versatility never before available in the security marketplace.

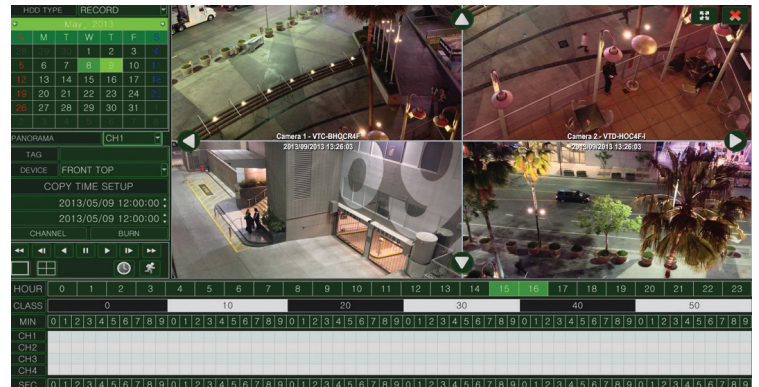

Local Management & Viewing Interface when paired with VT-HDOC 4 Channel HD-SDI DVR




(888) VITEK-70 | WWW.VITEKCCTV.COM
28492 Constellation Road Valencia, CA 91355

An Eye On Innovation

Specifications	
Sensor	1/2.9" Sony CMOS (IMX122LQJ)
Resolution	2.0 MegaPixel (1080p)
S/N	More than 52 dB (AGC Off)
Video Output	1x HD-SDI (BNC)
IR Illuminators	25 IR LEDs
IR Color Temp.	850nm
IR Range	100'
Dynamic Intensity IR LEDs	YES
Lens	4.3mm Fixed
Minimum Illumination	1 Lux at F1.2 / 0.1 Lux (B/W) / 0 Lux at IR On
Day/Night	Mechanical IR Cut Filter (True Day/Night)
Electronic shutter speed	Auto (1/ 30sec ~ 1/ 60,000sec)
White Balance	Auto
Brightness	Auto
DNR	3D-DNR
WDR	YES
HD Transmission Range	Up to 700' (Depending on cable characteristics and integrity)
Weather Resistance Rating	IP-68
Operating Conditions	14°-122°F (-10°-50°C) < 80% RH
Input Voltage	12VDC
Power Consumption (12VDC)	200mA / 450mA (IR OFF/ON)
Dimensions	2.95" x 5.12" x 8.39" (W x H x D)



HDcctv
High Definition CCTV Over COAX

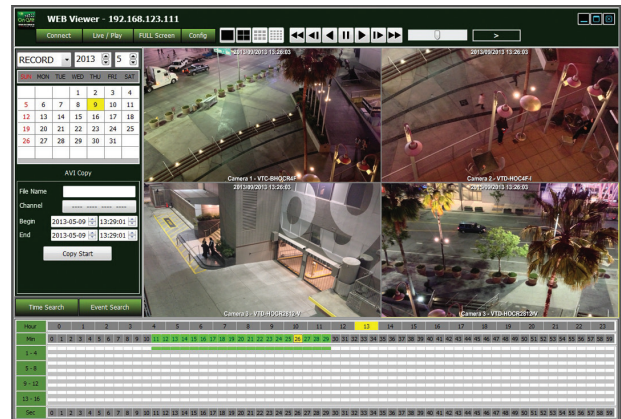

Remote viewing from anywhere using Internet Explorer

AVAILABLE CONFIGURATIONS

VTC-BHOCR4F 2.0MP HD-SDI IP68 Vandal Resistant WDR Bullet Camera with 4.3mm Lens & 25 IR LEDs

BREAKDOWN OF MODEL NUMBERS:

EXAMPLE: VTC-BHOCR4F

{VTC} {B} {H} {OC} {R} {4F}
VITEK Bullet HD-SDI Over Coax IR LEDs 4.3mm Fixed Camera

